

CORTEGA®/CORTEGA® Second Look®

Square Lay-in & Tegular
medium texture



Cortega® Angled Tegular panels with Prelude® 15/16" suspension system
(Pgs. 279-280)



Cortega® Second Look® II panels with Suprafine® 9/16" suspension system
(Pgs. 287-288)

Cortega® offers a medium-textured, economical solution with standard acoustical absorption.


KEY SELECTION ATTRIBUTES

- Economical
- Non-directional visual reduces scrap and installation time (excludes Second Look items)
- Geometric Scored Visuals (Second Look items)

TYPICAL APPLICATIONS

- Storage and supply rooms
- Discount stores
- Utility Rooms

FACE VIEW



Cortega Second Look I panels –
Scoring creates nominal 12" x 12" squares



Cortega Second Look II panels –
Scoring creates nominal 24" x 24" squares

COLORS Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.



White



Tech Black (BL)
Item 769

DETAILS (Other Suspension Systems compatible. Refer to listing on page 174.)




1



2



3



4




5

1. Cortega Square Lay-in
2. Cortega Beveled Tegular
3. Cortega Second Look
4. Cortega Lay-in with Prelude 15/16" suspension system
5. Cortega Beveled Tegular with Suprafine 9/16" suspension system

CORTEGA®/CORTEGA® Second Look®

Square Lay-in & Tegular medium texture

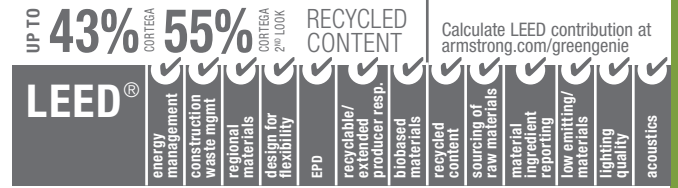

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 295-299 armstrong.com/catdwgs	Item No.	Dimensions (Inches)
CORTEGA® Square Lay-in			
	1	770 770M	24 x 24 x 5/8"
	1	824	24 x 24 x 5/8"
	1	769 ** 769M	24 x 48 x 5/8"
	1	823	24 x 48 x 5/8"
	1	747	24 x 48 x 5/8"
	1	773 773M	20 x 60 x 5/8"
	1	772 772M	24 x 60 x 5/8"
	1	Other Size Panels	W: 12" – 30" / L: 18" – 72" 5/8" Thick
CORTEGA Tegular			
	12	704 704M	24 x 24 x 5/8"
	12	816	24 x 24 x 5/8"
	12	703	24 x 48 x 5/8"
	29, 44, 48, 52, 56, 60	2195	24 x 24 x 5/8"
	29, 44, 48, 52, 56, 60	Other Size Panels	W: 12" – 30" / L: 18" – 72" 5/8" Thick
CORTEGA® Second Look® I			
	11	2765	24 x 48 x 3/4"
CORTEGA Second Look II			
	11	2758	24 x 48 x 3/4"
	11	2767	24 x 48 x 3/4"
	27	2776	24 x 48 x 3/4"

¹ Total Acoustics™ ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. ** Add 2-letter color suffix to item number when specifying or ordering (e.g., 769 B L).

SUSPENSION SYSTEMS

* Item 2195 – CAC 31 on 9/16" Silhouette or Trimlok.



NOTE: 9/16" Cortega Second Look items are installed using Suprafine suspension systems only.

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled.)
Fire Guard: A fire-resistive ceiling when used in applicable UL assemblies

ASTM E1264 Classification
Type III, Form 2, Pattern C D

Humidity/Sag Resistance
Standard performance ceiling panels, adequate where the building is enclosed and the HVAC is continuously functioning.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol. (Excludes 769BL)

Primary (Embodied) Energy
See all LCA information on our EPD's.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
2195, 704, 816, 703 – R Factor – 1.6 (BTU units);
R Factor – 0.28 (Watts units)
770, 772, 769, 773, 823, 824 – R Factor – 1.5 (BTU units); R Factor – 0.26 (Watts units)

LEED® is a registered trademark of the U.S. Green Building Council
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2015 AWI Licensing Company
Printed in the United States of America

Weight; Square Feet/Carton
769 – 0.61 lbs/SF; 96 SF/ctn
704, 2195 – 0.63 lbs/SF; 64 SF/ctn
772, 773 – 0.63 lbs/SF; 100 SF/ctn
703 – 0.65 lbs/SF; 80 SF/ctn
770 – 0.69 lbs/SF; 64 SF/ctn
816 – 1.08 lbs/SF; 48 SF/ctn
823 – 1.09 lbs/SF; 48 SF/ctn
824 – 1.09 lbs/SF; 64 SF/ctn
850 – 1.11 lbs/SF; 64 SF/ctn
2765, 2767 – 0.73 lbs/SF; 80 SF/ctn
2758 – 1.26 lbs/SF; 64 SF/ctn
2776 – 0.70 lbs/SF; 80 SF/ctn

Minimum Order Quantity
1 carton, excludes other size panels.

Metric Items Available
770M, 824M, 769M, 773M, 772M, 2195M, 704M, 703M, 823M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine™ / 1 877 ARMSTRONG
armstrong.com/commceilings
(search: cortega)
BPCS-3017/3022-615